





FLOOR/SCREED HEATING SYSTEMS

175W/M² | 230V

A perfect solution to achieve electrical floor heating, for instance in existing buildings: EHC underfloor heating mats make use of building floorings as an efficient heat storage medium.

TECHNICAL SPECIFICATIONS

Nominal voltage:	230 Volt
Output:	175 W/m ²
Cold tail connection:	4,00 m
Minimum installation temperature:	5 °C
Bending radius:	min. 40 mm
Resistance tolerance:	-5 % / +10 %
Delivery width:	0,90 m
Calculated width:	0,88 m

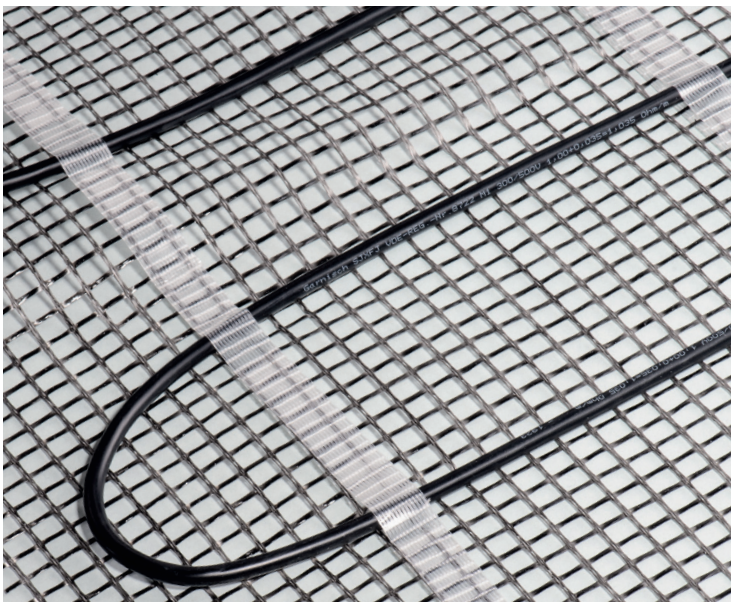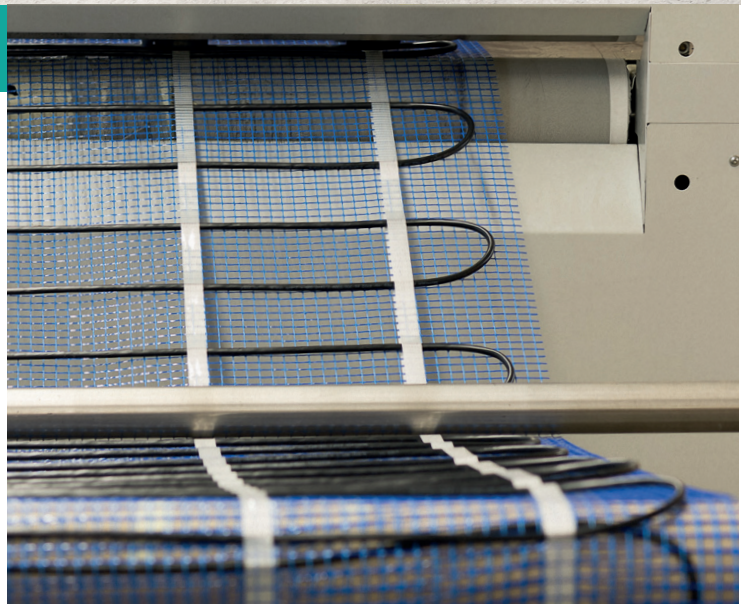


PRODUCT BENEFITS

- ideal to store heat in the flooring
- heating cable fixed on a fibreglass mesh
- very sturdy outer casing




FLOOR/SCREED HEATING SYSTEMS

175W/m² | 230V | 4 m Cold Tail Connection

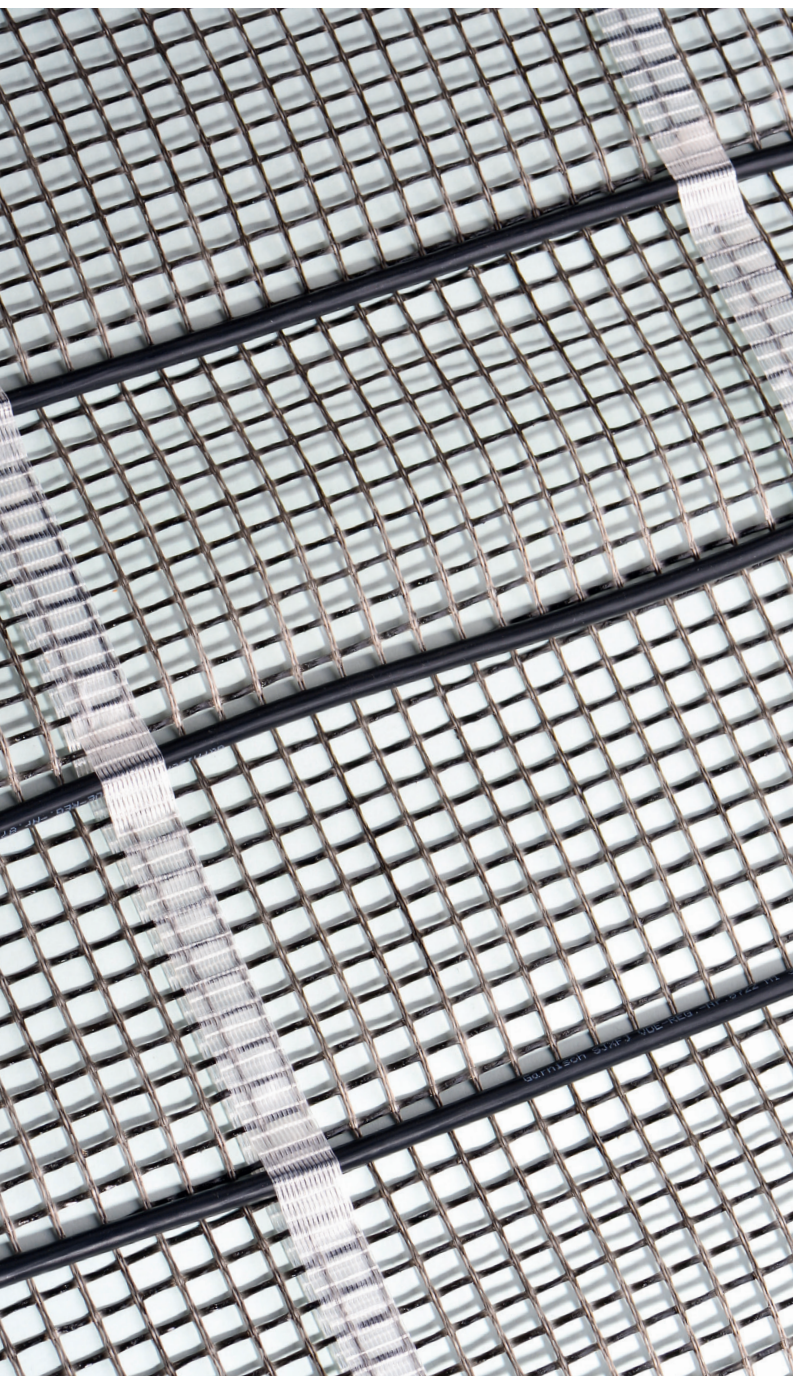

EHC FLOOR/SCREED HEATING SYSTEMS

LENGTH	AREA	OUTPUT	VOLTAGE
1,7 m	1,5 m ²	260 W	230 V
2,7 m	2,4 m ²	420 W	230 V
3,9 m	3,5 m ²	610 W	230 V
5,2 m	4,7 m ²	820 W	230 V
6,3 m	5,7 m ²	990 W	230 V
7,4 m	6,7 m ²	1170 W	230 V
9,4 m	8,5 m ²	1480 W	230 V
12,5 m	11,3 m ²	1970 W	230 V
17,3 m	15,6 m ²	2730 W	230 V

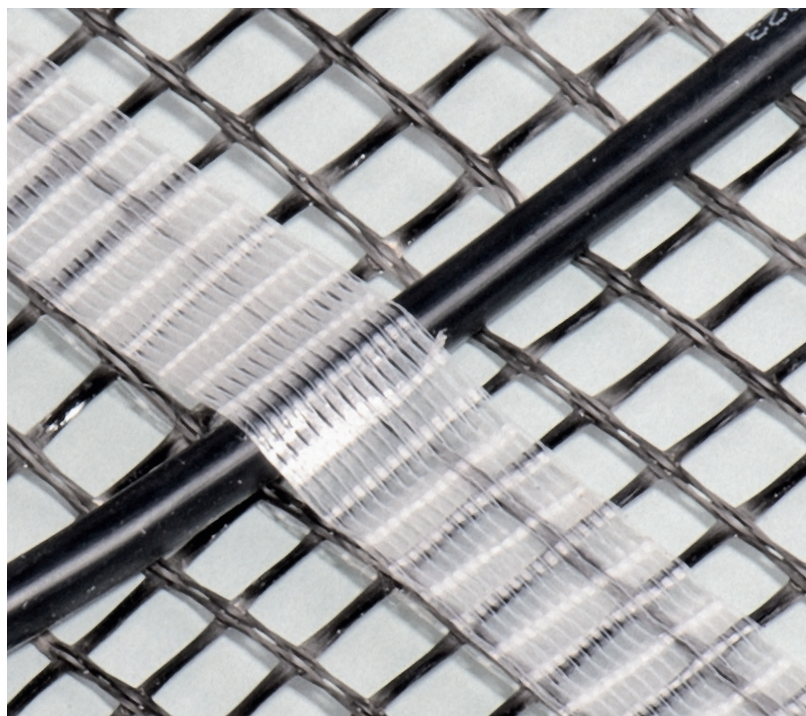

OTHER NEED-BASED
PRODUCTS UPON REQUEST