





X-MATS® AQUA

The solution for flexible and fast installation of underfloor heating pipes. The already pre-fixed pipes enable a quick and easy laying and installation.

TECHNICAL SPECIFICATION

Pipe types:	PE-RT PEX MLP
Dimension:	8-16 mm
Laying width:	max. 1 meter
Laying distance:	min. 0,10 meter
Roll length:	by arrangement

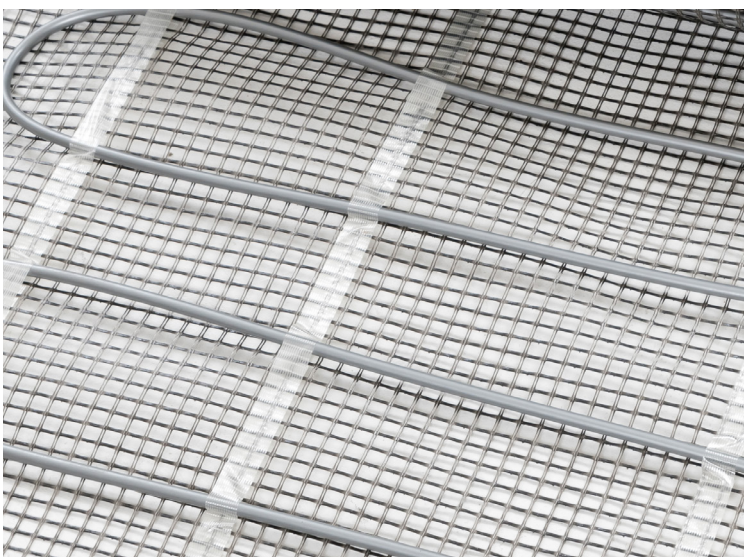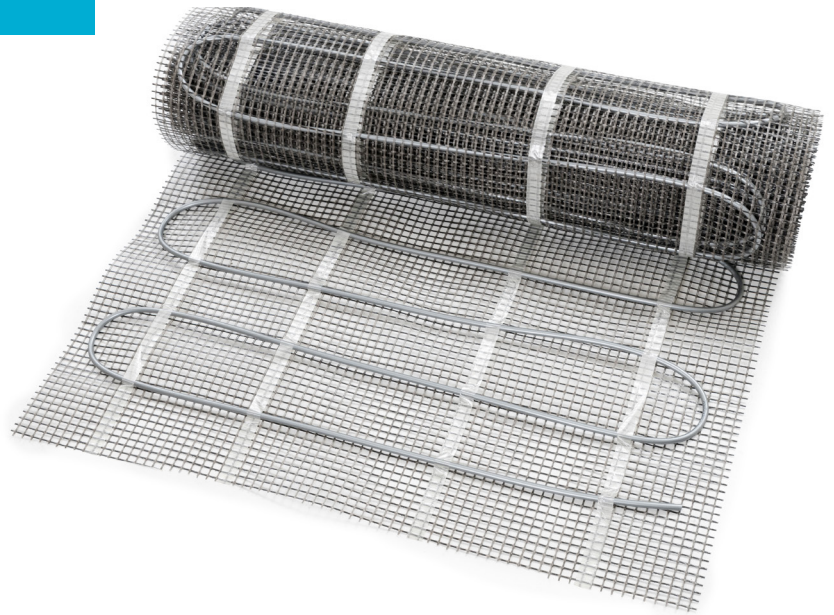

PRODUCT BENEFITS

- Flexible installation
- High time saving by simply rolling out
- No bloating due to fixing to the underground
- No additional mounting necessary
- Fixed pre-defined pipe distance
- Available on space-saving rolls


The X-MATS® fabrication process is also offered as a service for third-party pipes.

X-MATS® AQUA

X-MATS® AQUA

Pipe fixed on glass fibre mesh


Optional: self-adhesive mesh with protective foil, Velcro or double-sided adhesive tape for fixing the X-MATS® to the underground

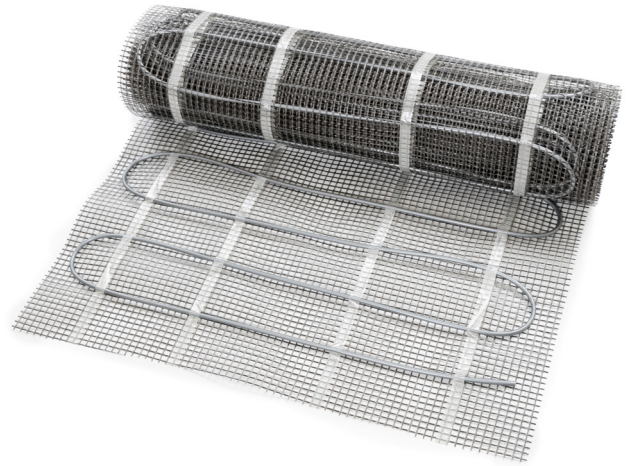

X-MATS® AQUA LIGHT

Pipe freely fixed

Optional: Velcro or double-sided adhesive tape for fixing the X-MATS® to the underground

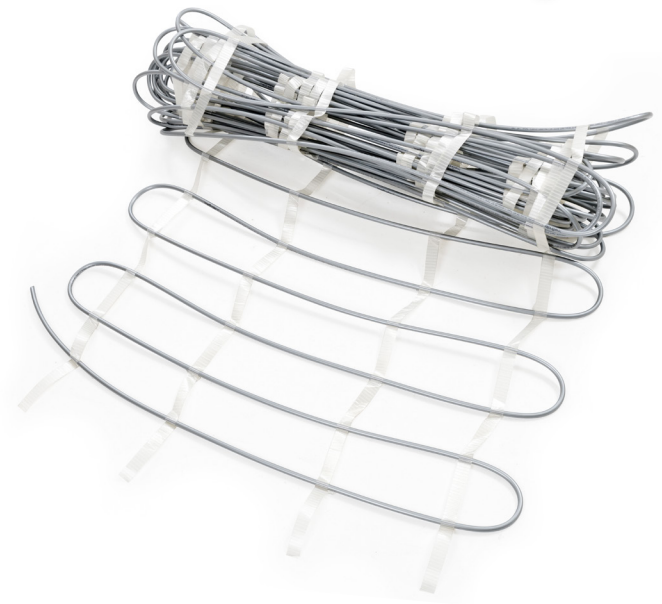

X-MATS® AQUA GREEN

Pipe fixed on recyclable foil for floating installation

Optional: Velcro or double-sided adhesive tape for fixing the X-MATS® to the underground



ASK US ALSO FOR YOUR INDIVIDUAL
REQUIREMENTS. WE WILL HELP YOU WITH
THE IMPLEMENTATION AND PRODUCTION.
