



# OUTDOOR HEATING SYSTEMS

300 W/M<sup>2</sup> | 400 V

For safe removal of snow and ice from paths, ramps, driveways and other surfaces: EHC's outdoor heating systems are easy to install and are available in three adaptable to the most preferred substrate versions: screed/sand, concrete and mastic asphalt.


## TECHNICAL SPECIFICATIONS

Nominal voltage:	400 Volt
Output:	300 W/m <sup>2</sup>
Cold tail connection:	12 m
Minimum installation temperature:	5 °C
Bending radius:	min. 40 mm
Resistance tolerance:	-5 % / +10 %
Delivery width:	0,80/ 0,90 m
Calculated width:	0,88 m



## PRODUCT BENEFITS

- for greater safety on walkways, ramps and other forms of public thoroughfares
- help thaw snow and ice, prevent formation of snow and ice sheets
- sturdy heating mats for easy installation underneath tiles, sand, concrete and mastic asphalt

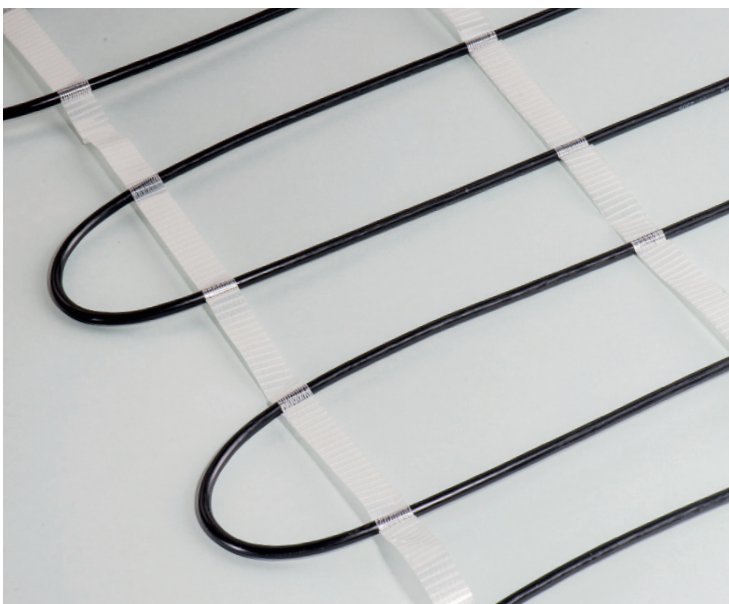





# OUTDOOR HEATING SYSTEMS

300W/m<sup>2</sup> | 400V | 12 m Cold Tail Connection



## Screed & sand

EHC Outdoor Heating Systems Thermoflex

LENGTH	AREA	OUTPUT	VOLTAGE
3,30 m	3,0 m <sup>2</sup>	900 W	400 V
5,00 m	4,5 m <sup>2</sup>	1350 W	400 V
6,60 m	6,0 m <sup>2</sup>	1800 W	400 V
10,00 m	9,0 m <sup>2</sup>	2700 W	400 V
13,30 m	12,0 m <sup>2</sup>	3600 W	400 V
15,50 m	14,0 m <sup>2</sup>	4200 W	400 V

## Mastic asphalt\*

EHC Outdoor Heating Systems mastic asphalt

LENGTH	AREA	OUTPUT	VOLTAGE
3,30 m	3,0 m <sup>2</sup>	900 W	400 V
5,00 m	4,5 m <sup>2</sup>	1350 W	400 V
6,60 m	6,0 m <sup>2</sup>	1800 W	400 V
10,00 m	9,0 m <sup>2</sup>	2700 W	400 V
13,30 m	12,0 m <sup>2</sup>	3600 W	400 V
15,50 m	14,0 m <sup>2</sup>	4200 W	400 V

\*2 x 12 m Cold Tail Connection



OTHER NEED-BASED  
PRODUCTS UPON REQUEST